


CUBISCAN 325

MEASURE AND WEIGH APPAREL, SKUS, AND IRREGULAR ITEMS

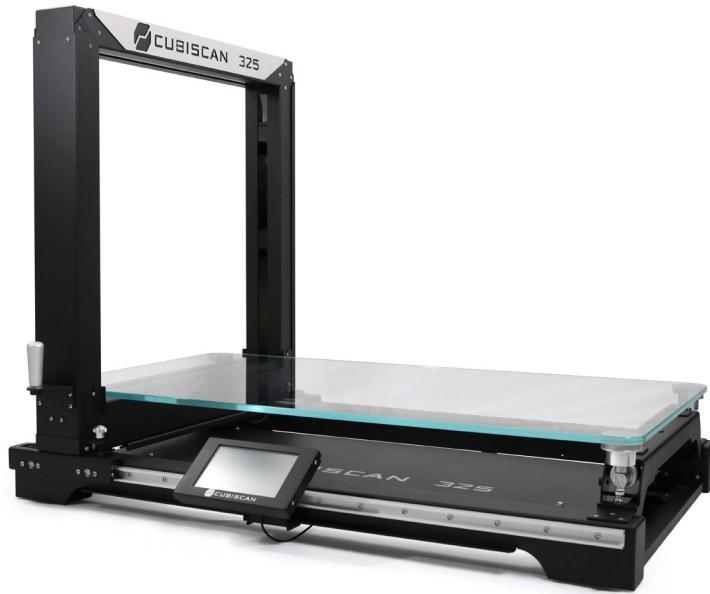

USER BENEFITS

- Accurate master data
- Measure case packs, inner packs, & eaches with one dimensioner
- Reliable data for putaway, pick 'n pack, and fulfillment
- Quick, reliable dimensions on hard to measure SKUs

MEASUREMENT RANGE

- 36" L x 24" W x 24" H and 50 lb

PARCEL TYPES

- Irregular
- Cuboidal

PRODUCT DESCRIPTION

The Cubiscan® 325 was built to take the Cubiscan 25 to a larger measurement capacity. Although the Cubiscan 325 can measure boxed items, its primary strength is dimensioning unboxed, irregular items with high accuracy. Designed specifically to measure and weigh medium-sized, boxed, and unboxed SKU's for distribution, packaging, and warehousing applications, the CS 325 is fast becoming one of our most popular and highly-requested products of the past decade.

- Complete mobility (battery included) means easy access and use in warehouse aisles
- Extremely accurate data enhances the ability for on-demand, box-making applications
- Compression feature greatly enhances accuracy when measuring apparel
- Easy-glide gate makes for quick and effortless measurements



PRODUCT FEATURES

- Infrared light sensing technology
- Compression feature for apparel
- 0.05" resolution
- Intuitive and user-friendly touch display

The Cubiscan 325 is designed to maximize storage space and enhance cartonization methods, which can reduce the use of packaging materials and potentially decrease dimensional-based shipping charges. The cube and weight data collected by the CS 325 also benefits the environment by reducing packaging waste and minimizing fuel emissions.

MEASUREMENT RANGE	PHYSICAL SPECIFICATIONS
Length: 0.10-36.00 in (0.2-90.0 cm) Width: 0.10-24.00 in (0.2-60.0 cm) Height: 0.10-24.00 in (0.2-60.0 cm) Weight: 0.005-50.000 lb (0.002-25.000 kg)	Length: 49 in (125 cm) Width: 38 in (97 cm) Height: 38 in (97 cm) Weight: 173 lb (78.5 kg)
PERFORMANCE SPECIFICATIONS	OTHER
Operating speed: 3-7 seconds Dimensional increment: 0.05 in (0.1 cm) Weight increment: 0.005 lb (0.002 kg) Weight: 0.005-50.000 lb (0.002-25.000 kg)	Data connections: Ethernet (1), Serial (1), USB (1) Humidity: 0% to 90% non-condensing Measure sensor: Infrared light beam Operating temperature: 14° to 104°F (-10° to 40°C) Power requirements: 100-240 VAC, 50-60 Hz Weight sensor: Four load cells

